






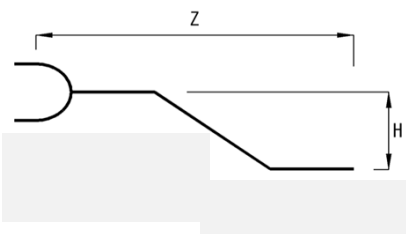















### HPPE関連部材設計値

部材	Φ50	設計値
直管、EF片受直管 	外径	63
	L	5000
両挿ベンド 	L(90°)	210
	L(45°)	160
	L(22° 1/2)	140
	L(11° 1/4)	132
	Lo(90°)	420
	Lo(45°)	320
	Lo(22° 1/2)	280
EF片受ベンド 	Z(90°)	156
	Z(45°)	106
	Z(22° 1/2)	86
	Z(11° 1/4)	83
	L2(90°)	212
	L2(45°)	161
	L2(22° 1/2)	143
	L2(11° 1/4)	135
	Lo(90°)	368
	Lo(45°)	267
	Lo(22° 1/2)	229
	Lo(11° 1/4)	218
	EF両受ベンド 	Z(90°)
Z(45°)		106
Z(22° 1/2)		86
Z(11° 1/4)		83
Lo(90°)		312
Lo(45°)		212
Lo(22° 1/2)		172
EF両受チーズ 	H(50×50)	181
	Z1(50×50)	33
	Lo(50×50)	66
EFキャップ 	Lo	166
EF両受Sベンド 	H(H300)	300
	Z(H300)	511
	H(H450)	450
	Z(H450)	636
	H(H600)	600
	Z(H600)	811

部材	Φ50	設計値
EF片受 Sベンド 	H(H300)	300
	Z(H300)	567
	H(H450)	450
	Z(H450)	717
	H(H600)	600
	Z(H600)	867
片挿フランジ 	Lo	190
EF片受フランジ 	Lo	158
PE挿口付ソフトシール仕切弁 	Lo	666
ダクタイル鋳鉄管用片落異種管継手(K形) 	Lo(100×50)	740
	Lo(75×50)	690
ダクタイル鋳鉄管用片落異種管継手(GX形) 	Lo(100×50)	740
	Lo(75×50)	662
ダクタイル鋳鉄管用片落異種管継手(NS形) 	Lo(100×50)	740
	Lo(75×50)	690

部材	Φ50	設計値
PCジョイント片落 	Lo(75 × 50)	31
	Lo(100 × 50)	50
	Lo(150 × 50)	69
PPチーズ 	Z <sub>1</sub>	81
	Z <sub>2</sub>	82
	Lo	164
PPベンド90° 	Lo × 2	182
PPベンド45° 	Lo × 2	99
PPベンド22° 1/2 	Lo × 2	70
PPベンド11° 1/4 	Lo × 2	73
PC短管1号 	Lo	73